

DIGITAL COMPARABLE ELECTRONIC COIN SELECTOR

FRONT INSERTING TYPE

INSTALLATION HI-07GS+LED

STEP1

Change the right coin for use from the clamp

STEP2

Adjust the right insert size for use from the front panel in back side

STEP3


Select the right mode: Normal Open/Normal Close
 "TIMER SWITCH" for synchronizing your system
 100ms(Slow Speed/Long Pulse)
 50ms(Medium Speed/Medium Pulse)
 30ms(Fast Speed/Short Pulse)

STEP4

Adjust VR sensitivity tuning
 clockwise : slack selection (LED dark → light)
 anti-clockwise : strict selection (LED light → dark)


STEP5

5 lines with 4 pins

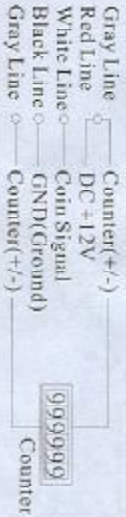

STEP6

Alarm connect way

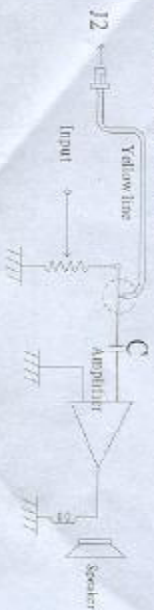


COIN SPECIFICATION

Diameter: 18mm ~ 31mm
 Thickness: 1.2mm ~ 3.0mm

USER EQUIPMENT

Voltage: DC 12V ±20%
 Currents: 200mA

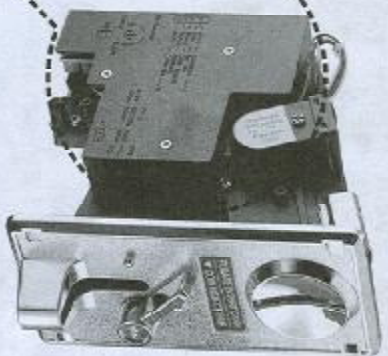

STEP3
 Select the right mode:
 Normal Open/Normal Close

STEP6
 Alarm connection input

STEP3
 "TIMER SWITCH" for
 synchronizing your system
 100ms(Slow Speed/Long Pulse)
 50ms(Medium Speed/Medium Pulse)
 30ms(Fast Speed/Short Pulse)

STEP4
 Adjust VR sensitivity tuning
 clockwise : slack selection
 anti-clockwise : strict selection



21B Squires Street, Cortland, NY 13045
 352-678-3021, www.vendapin.com