



21B Squires Street
Cortland, NY 13045
Phone: +1.352.279.7727
Fax: +1.775.521.1673
Web: www.vendapin.com

TG-2460 Printer Installation for 5596XL

1. Remove the coin changer and the ePort read head. When finished, the housing should look like Figure 1.



Figure 1

2. Attach the enclosed template for the hole pattern required to mount the G-6 read head to the front of the housing as in Figure 2. The large hole on the template must line up with the rectangular opening in the changer mounting plate. Drill all holes and de-burr the housing.

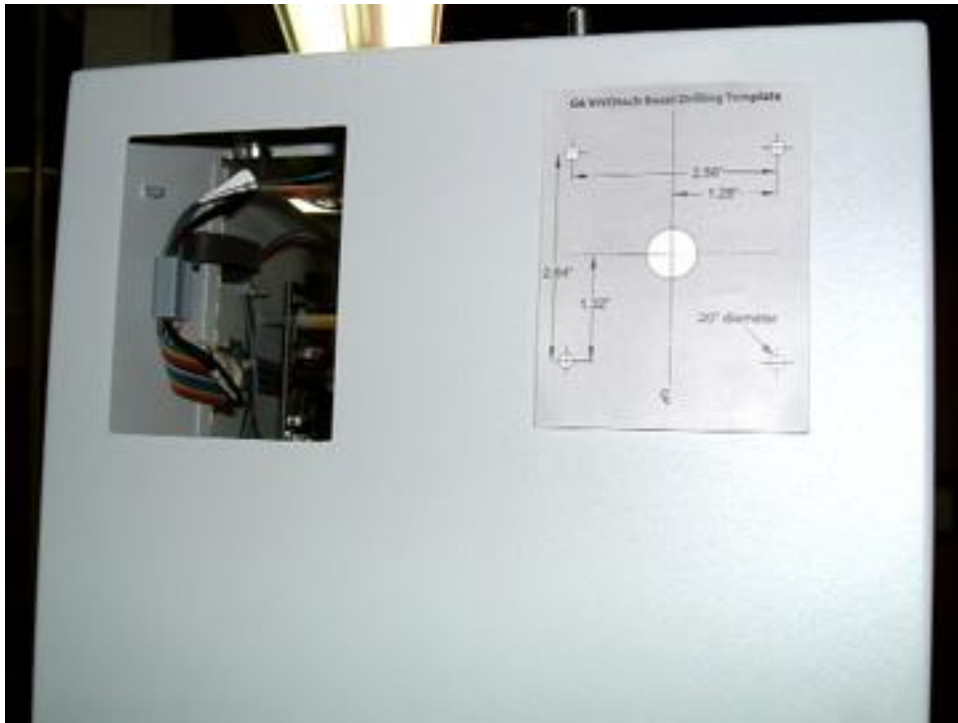


Figure 2

3. Install the credit card read head. Route the cable up through the small slot in the coin changer mounting plate. See Figure 3. Install the changer.



Figure 3



4. Install the mounted printer assembly in the opening where the ePort used to be mounted. Secure the plate with the 4, M4 Kep nuts provided in the kit. **NOTE: THE PRINTER ASSEMBLY IS REVERSIBLE, BUT WE SUGGEST THIS MOUNTING.** See Figure 4.



Figure 4

5. Connect the printer power harness to the DC to DC Converter, mounted on the door of the coin op, just below and to the right of the control board. Red wire connects to +24 Volts and black wire connects to ground. Replace the terminal strip cover when complete. Figure 5.

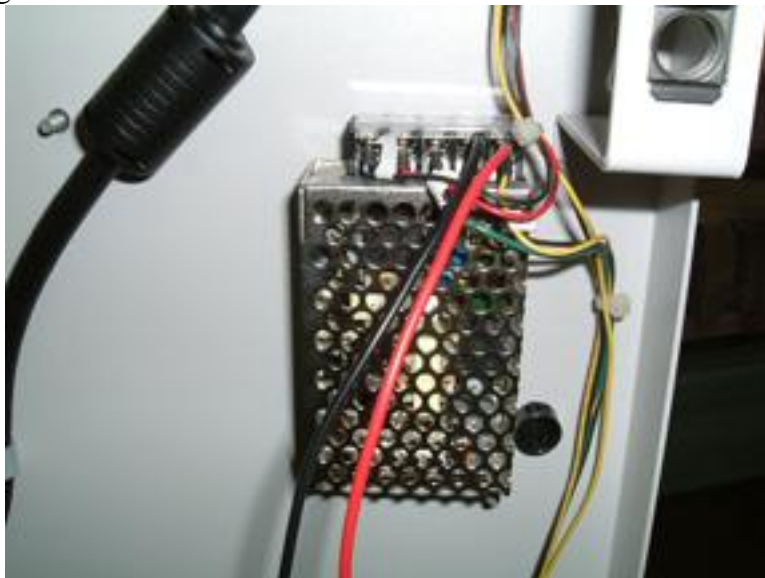


Figure 5



6. Connect the communications cable to the Raptor II control board, J-9, serial port. See Figure 6.



Figure 6

7. Connect the power harness and communications cable to the printer. Figure 7.



Figure 7



8. Route the two cables under the printer, across the bottom to the right of the Bill Acceptor.
Figure 8.

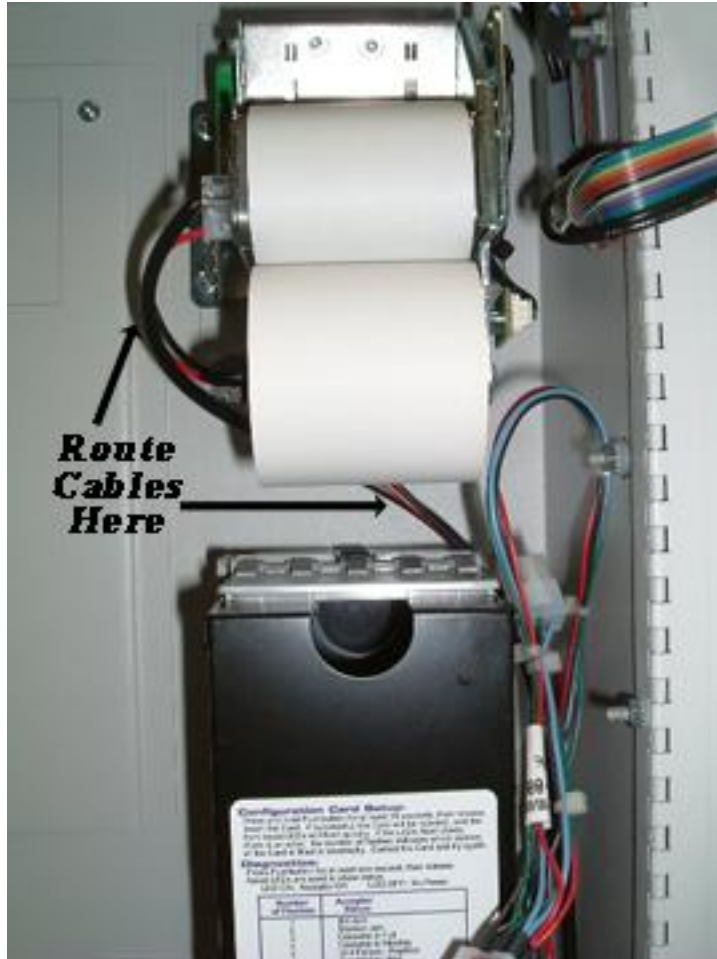


Figure 8



9. Use the supplied Ty Wraps (2 ea) to secure the cables. See Figure 9.



Figure 9

10. Installation of the printer is now complete. Please refer to your Owner's manual, page 55, for instructions to set up your new printer.